




LED Shoebox/Area Light (Sensor Optional)

100-347V | Original design | ETL | DLC PREMIUM | FC | 5 Years Warranty | Microwave sensing | 0-10V Dimmer | 150 Lm/W | LM-70 | CRI >70 | PF ≥0.95

PRODUCT FEATURES

- UL/CUL/ETL/CETL/DLC listed.
- High lumen efficiency >150lm/w.
- IP66 rated for wet location.
- High-efficiency LED Driver, the wide range input voltage AC100-347V
- 5 year's warranty.
- 3 types of beam angle PC lens for option (TypeII TypeIV TypeV)
- Multi-function optional, easy to operate (Normal light, Photocell sensor Microwave sensor+Photocell sensor)
- Various of connectors available, easy to assemble.


PRODUCT DIMENSION

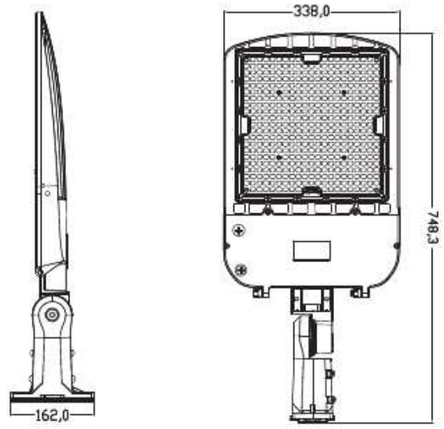


SPECIFICATION

Watt Tunable: Switch 1
200W 240W 300W

CCT Tunable: Switch 2
4000K 5000K 6500K

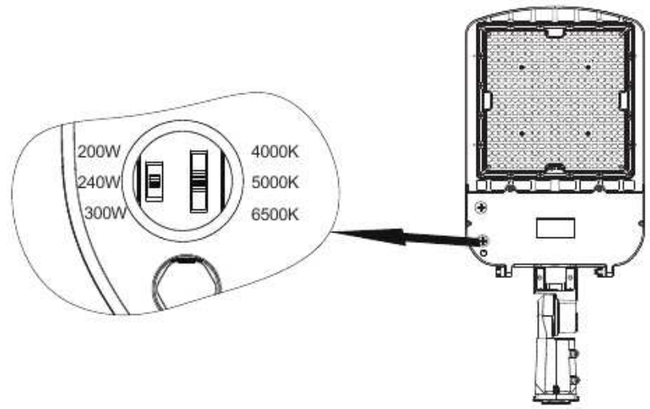

Part NO.	Power	Input Voltage	IP Rating	Lens angle	Input Current	PF	Light Efficacy	Ra	CCT
SXT-300W-H-H-5000K	200W/240W/300W	AC120-277V	IP 65	T3 T4 T5	2.0A	>0.9	150lm/W	70	4000K-5000K-6500K

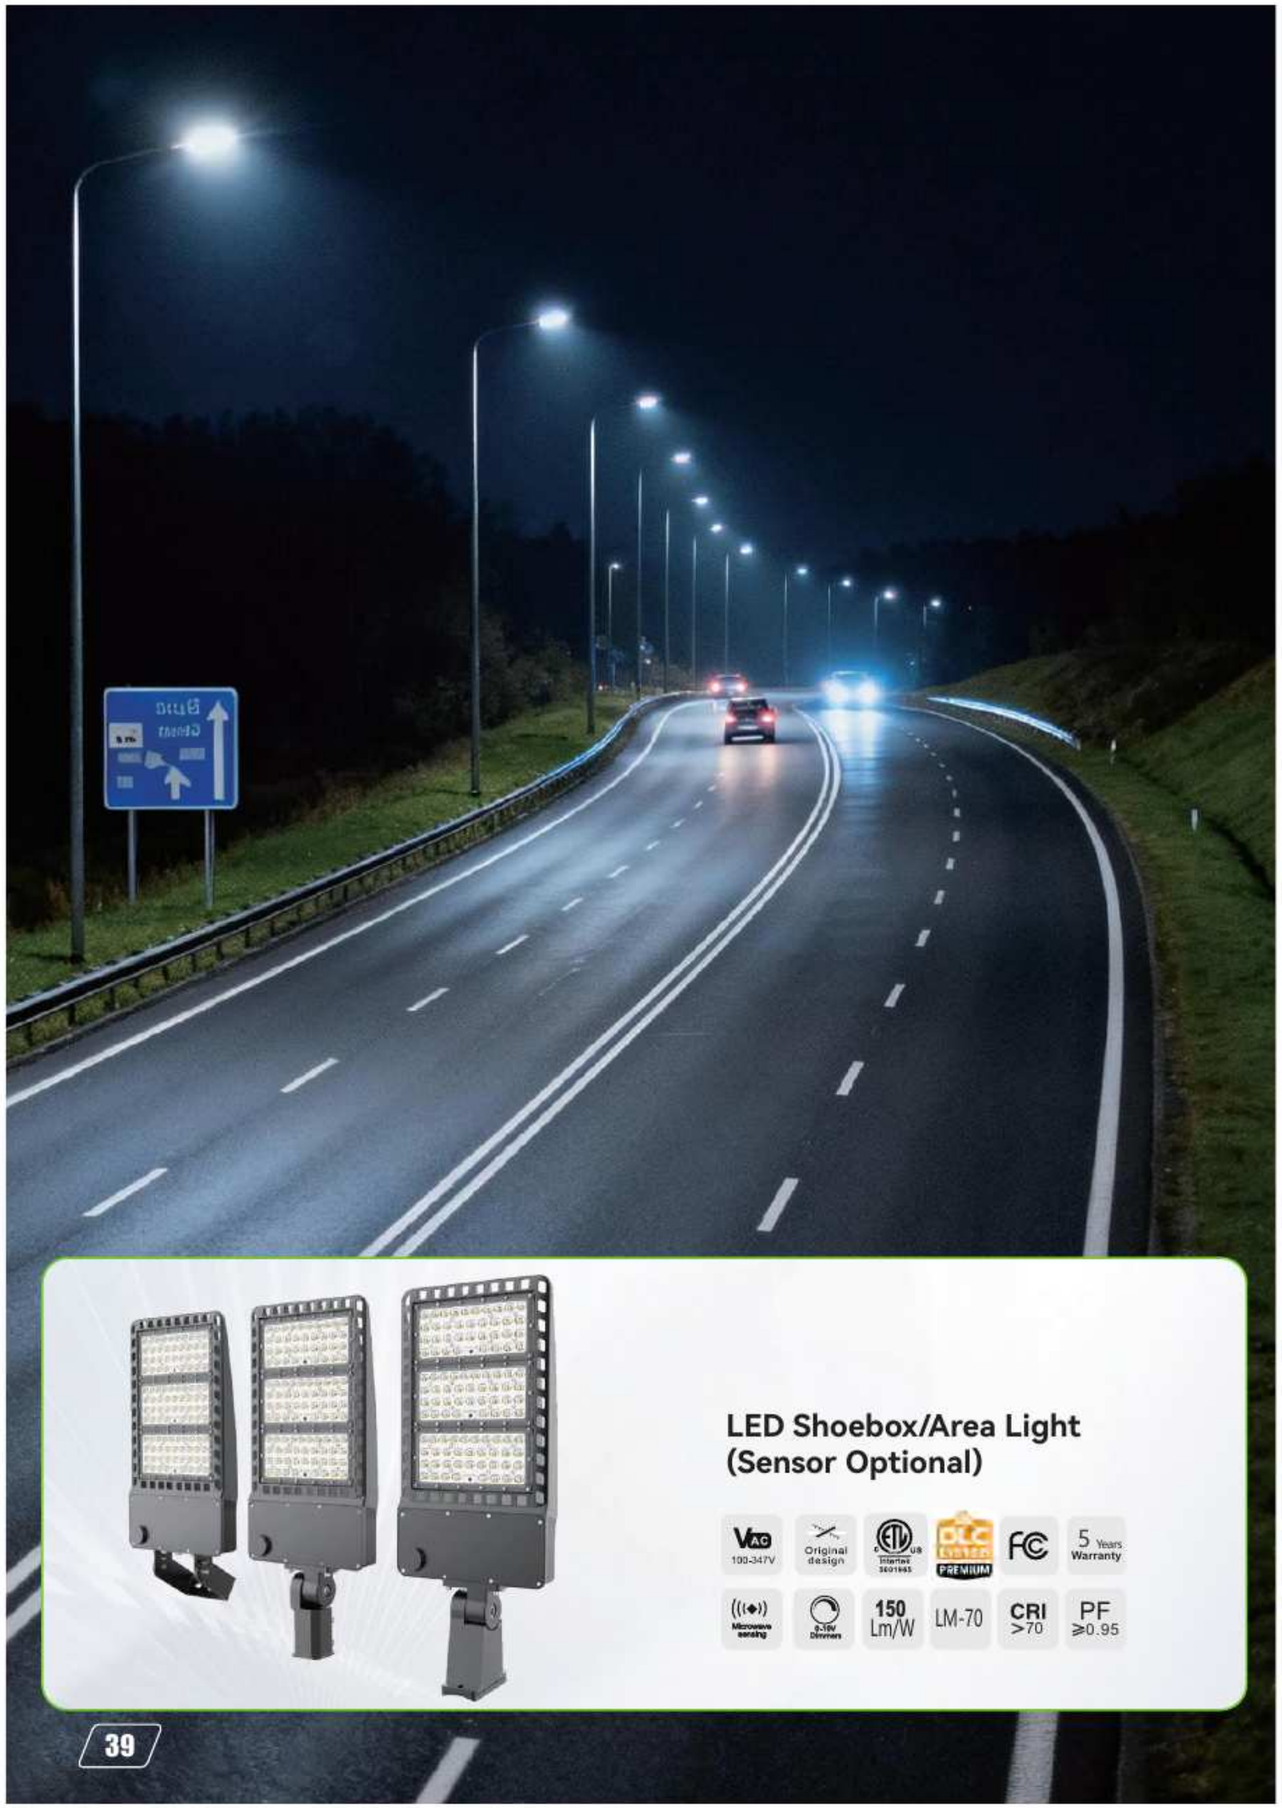


LED Shoebox/Area Light
(Sensor Optional)

PRODUCT FEATURES

- UL/CUL/ETL/CETL/DLC listed.
- High lumen efficiency >150lm/w.
- IP65 rated for wet location.
- High-efficiency LED Driver, the wide range input voltage AC120-347V / AC277-480V.
- 5 year's warranty.
- 3 types of beam angle Pc lens for option (TypeIII, TypeIV, TypeV).
- Multi-function optional, easy to operate (Normal light, Photocell sensor).
- Microwave sensor+Photocell sensor, Time setting.
- CCT:5000K
- Various of connectors available,easy to assemble.

PRODUCT DIMENSION

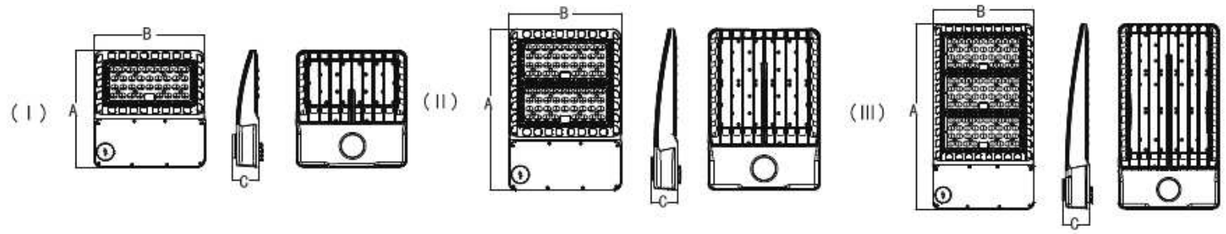

Model	Photo	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
SXT-200W-H-H-XXXXK	I	13.14"(334mm)	12.44"(316mm)	2.95"(75mm)
SXT-300W-H-H-XXXXK	II	17.91"(455mm)	12.44"(316mm)	2.95"(75mm)
SXT-400W-H-H-XXXXK	III	22.79"(597mm)	12.44"(316mm)	3.31"(84mm)
GL-SX3-150W-H-HV	I	13.14"(334mm)	12.44"(316mm)	2.95"(75mm)
GL-SX8-300W-H-HV	II	17.91"(455mm)	12.44"(316mm)	2.95"(75mm)

SPECIFICATION



Model	Power Tunable	Input Voltage	IP Rating	Lens angle	PF	Lumen Efficacy	Ra	CCT Selectable
SXT-200W-H-H-XXXXK	100-150-200W	AC120-347V	IP 65	T3 T4 T5	>0.95	150Lm/W	70	5000K
SXT-300W-H-H-XXXXK	200-240-300W	AC120-347V	IP 65	T3 T4 T5	>0.95	150Lm/W	70	5000K
SXT-400W-H-H-XXXXK	300-350-400W	AC120-347V	IP 65	T3 T4 T5	>0.95	150Lm/W	70	5000K
GL-SX3-150W-H-HV	100-120-150W	AC277-480V	IP 65	T3 T4 T5	>0.95	150Lm/W	70	5000K
GL-SX8-300W-H-HV	200-240-300W	AC277-480V	IP 65	T3 T4 T5	>0.95	150Lm/W	70	5000K