LED Linear Hanging (Suspended) Light




Top features

- 3 Power and 4 CCT field-adjustable.
- Selectable direct-Indirect light distributions.
- Fast and seamless continuous runs available.
- I / L/ T/ X/ Y/ 120° connectors available. (I am standard.)
- Multiple mount methods.
- Sensor solution ready.
- EM available on 4ft and 8ft models


DLC LISTED · c ETL us Intertek · 0-10V DIMMERS · 5 Years warranty

Fast and seamless connection

Screw-free to remove end-cover.
Tool-free press lock connection.

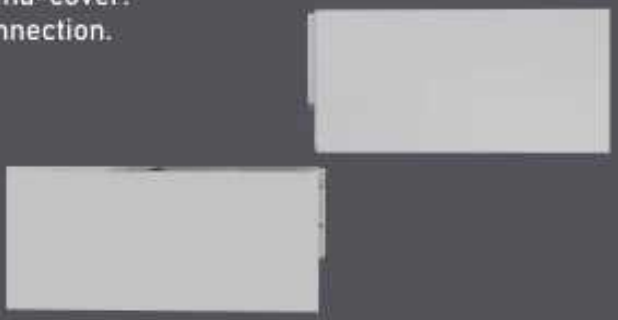

Distributions

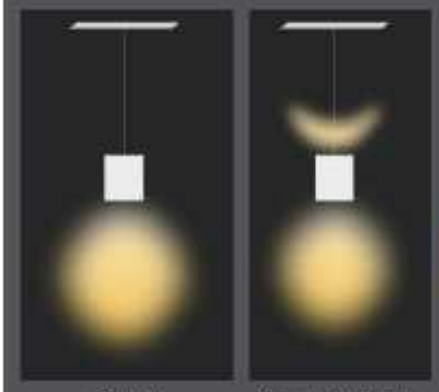

Direct-Indirect flux ratio adjustable

UP	Down
0%	100%
10%	90%
20%	80%
30%	70%

Specifications

ETL Listing:
Suitable for damp locations

LEDs:
Long-life, high-efficacy, micro-power LEDs

Lifespan:
Lumen Maintenance, L70 > 100,000 hours

Housing and Lens:
Aluminium, PC lens


Ambient Operating Temperature:
-20°C (-4°F) to 50°C (122°F)[2]

Driver:
Driver includes dimming control wiring for 0-10V dimming systems.


CRI > 80 default, CRI>90 optional.

Dimensions

Length

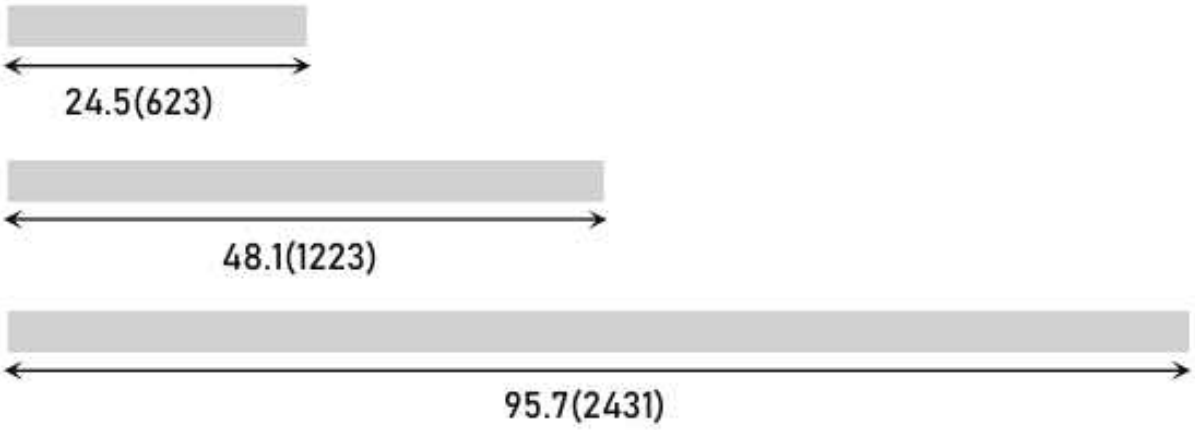

Height and Width



Size unit: inch(mm)

Mounting

Suspended mount, Surface mount, Wall mount, and Recessed mount are available.
Accessories for all types except Suspended mount must be purchased separately.



Suspended mount




Surface mount

Wall mount



Recessed mount

Connections

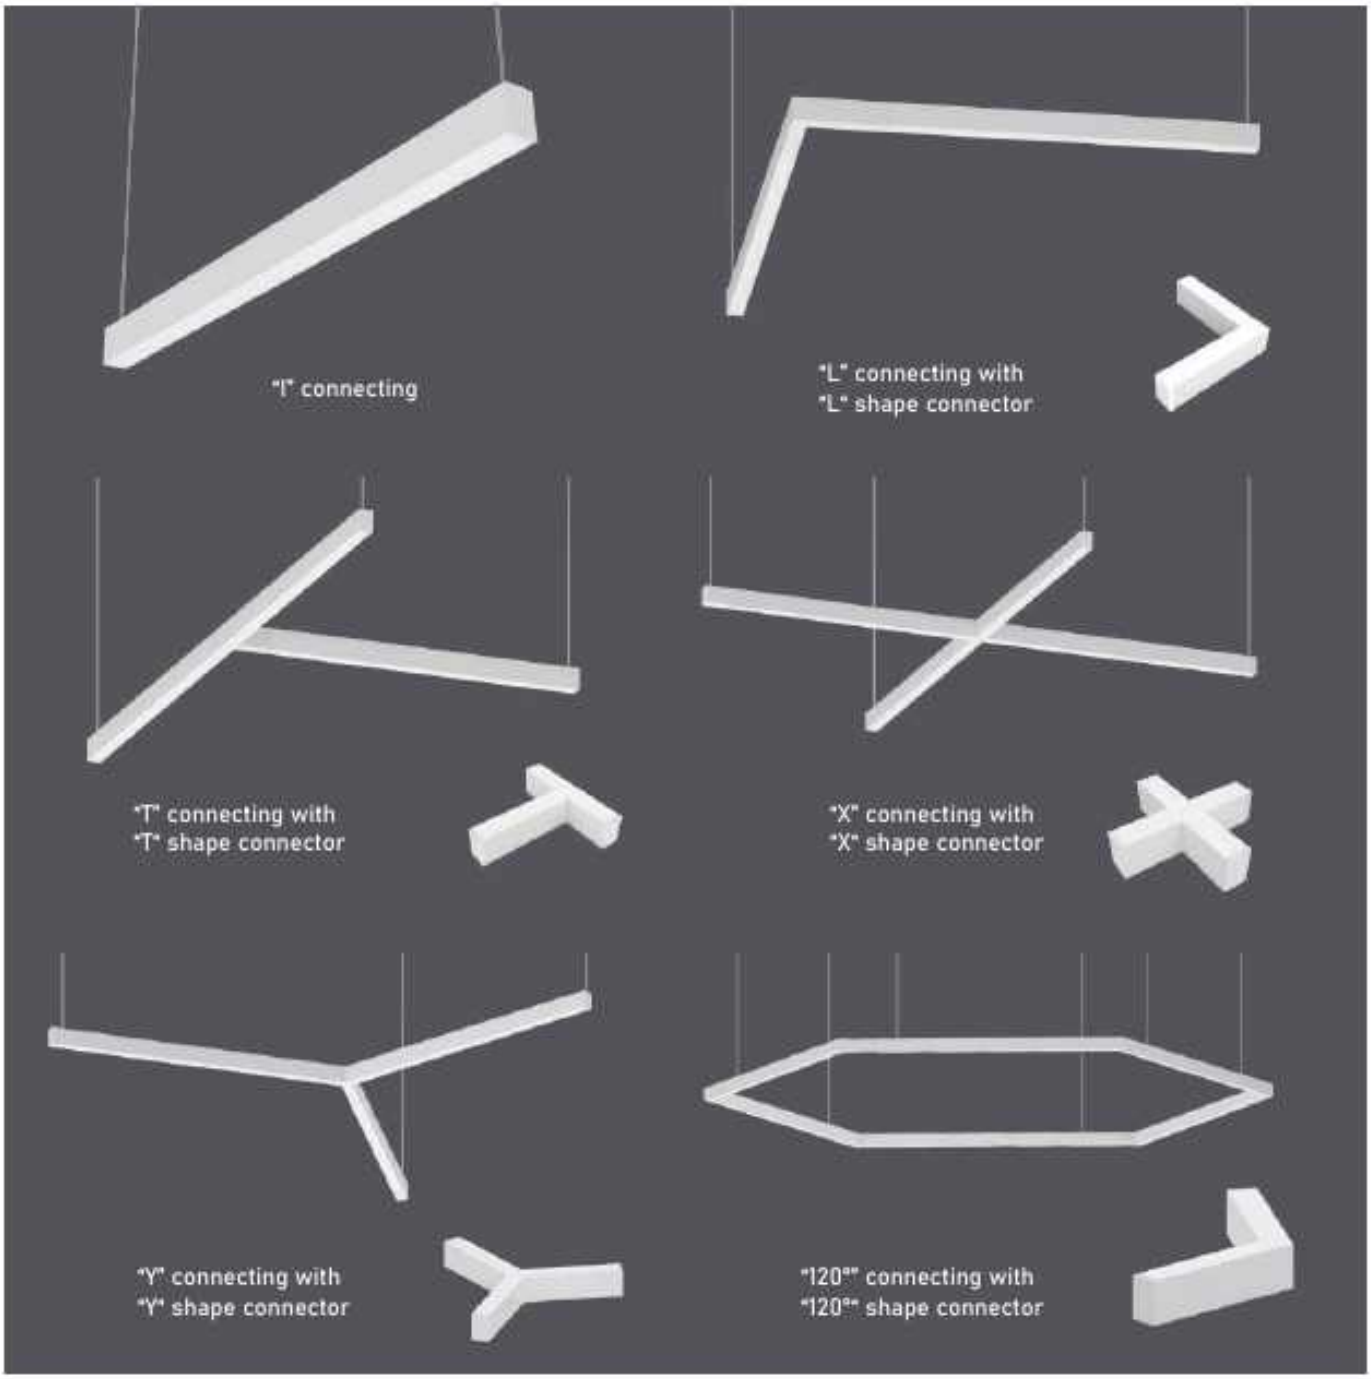

Change to DIY soft lens which can be cut by end-users for seamless continuous runs.
Total connected load is <500W at 120Vand 1000W at 277V which included the connectors.

Max. No.* of each Power feed

Size / Power	AC 120V	AC 277V
2FT / 25W	19 PCS	38 PCS
4FT / 50W	9 PCS	19 PCS
8FT / 80W	6 PCS	12 PCS


Selectable table

Power & CCT & Direct-indirect flux ratio field-adjustable

Catalog No.	Input Wattage(W)	Lumens Rated(lm)	Efficacy Rated	CCT
LF-2FT-25W-L-H	15W-20W-25W	1950/2600/3250	130 lm/W	6500K-5000K-4000K-3500K
LF-4FT-50W-L-H	40W-45W-50W	5200/5850/6500	130 lm/W	
LF-8FT-80W-L-H	60W-70W-80W	7800/9100/10400	130 lm/W	

Connector dimensions (Optional

Size unit: inch(mm)

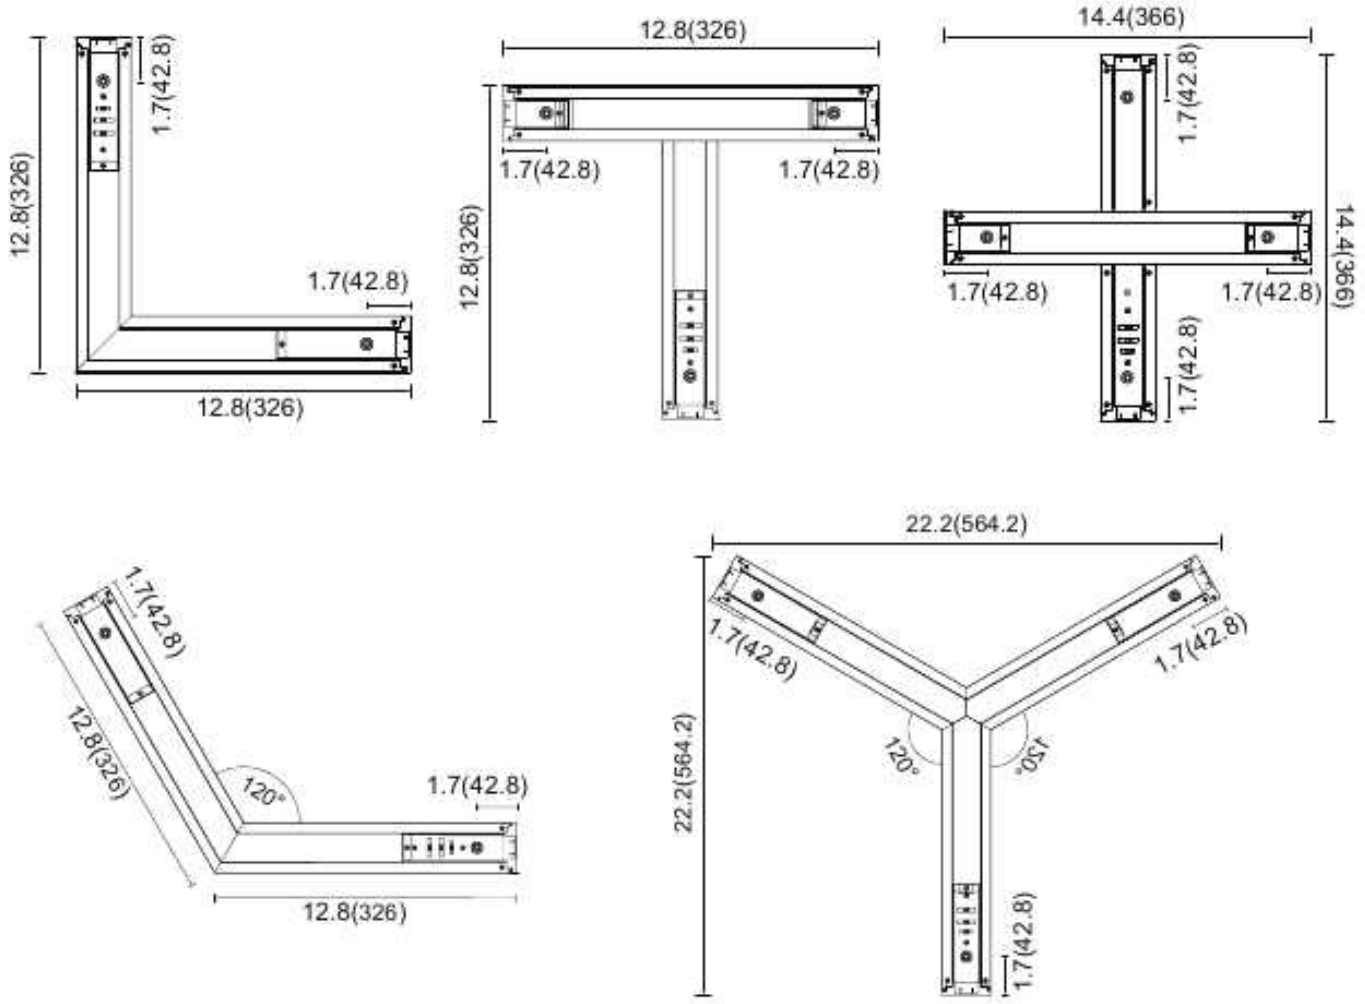

Installation accessories

"L" connector



"T" connector



"X" connector



"Y" connector




"120°" connector



Suspension mount kit

Standard equipment. Others are optional.

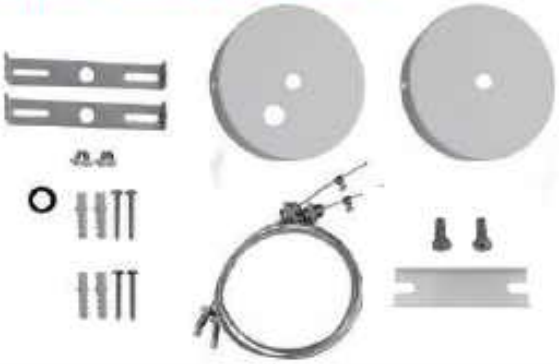



Cable kit for connection



AC sensor installation canopy kit (sensor installed)



Soft DIY-cut diffuser, 49.2' length per roll



Note: Subject to change without notice. Errors and omission excepted.
Always make sure to use the most recent release

Packing/weight

Part NO.	Outer Carton Size (LxWxH)	Qty/Carton (pcs)	Net weight (kg)(lbs)	Gross weight (kg)(lbs)	20GP (QTY)	40HQ (QTY)
LF-2FT-25W-L-H	876x192x202mm (34.49"x7.56"x7.95")	6PCS	1.3 kg (2.87 lbs)	12 kg (26.46 lbs)	4992	11172
LF-4FT-50W-L-H	1476x192x202mm (58.11"x7.56"x7.95")	6PCS	2.2 kg (4.85 lbs)	18 kg (39.68 lbs)	2952	6708
LF-8FT-80W-L-H	2475x135x229mm (97.44"x5.31"x9.02")	4PCS	4.1 kg (9.04 lbs)	20 kg (44.09 lbs)	1376	3340

Packing

