LED STADIUM LIGHT (SR05)

WATTAGES: 600/500/400/300W, 1200/1000/800/900W Tunable



This next-generation LED Sports Light features a separated driver box design, offering flexible installation options, making it easy to install. This Sport Light is designed for maximum brightness, energy efficiency, and durability making it the ideal replacement for traditional floodlights and stadium lights.
With advanced thermal management technology ensuring excellent lighting for sports fields stadiums, and large outdoor venues.

PRODUCT FEATURES:

- High efficiency LED Driver,the wide range input voltage AC120-277V, AC120-347V,AC200-480V, Surge protection:10KV
- Lumileds LED high luminous efficiency and long life.
- Cast aluminum design,better cooling and easy replacement.
- Excellent optical design,greatly improve the light utilization and evenness.
- Available Wattage:300W-1200W.
- Custom Engineered Optics:15e-60e Optional.
- Tunable power optional
- Slip fitter mounting optional.

SPECIFICATION		
MODEL	SS-SR05-600W	SS-SR05-1200W
WATTAGE	600/500/400/300W Tunable	1200/1000/900/800W Tunable
LUMNES	90000LM(Max)	180000LM(Max)
CCT	5000K	
CRI	Ra>70	
INPUT VOLTAGE	AC120-277V/AC120-347V/AV277-480V	
LIGHTING ANGLE	15°,25°,40°,60°	
OPERATING TEMPERATURE	-40°F~113°F	
STORAGE TEMPERATURE	-40°F~158°F	
PF	＞0.9	
DRIVER EFFICIENCY	＞90%	
PROTECTION LEVEL	Wet	
LIFE TIME	>50000 hous	
WARRANTY	5 years limited	

LED STADIUM LIGHT (SR05)


WATTAGES: 600/500/400/300W, 1200/1000/800/900W Tunable


PACKING/WEIGHT:

Part NO.	Outer Carton Size (L×W×H)	Qty/Carton (pcs)	Net weight (lbs/kg)	Gross weight (lbs/kg)
SS-SR05-600W	18.23x17.17x12.80 inch 8.27x7.79x5.81 mm	1	24.03Lbs(10.9Kg)	28Lbs(12.7Kg)
SS-SR05-1200W	23.35x22.68x17.64 inch 10.59x10.29x8 mm	1	46.08Lbs(20.9Kg)	45.90Lbs(20.82Kg)


Product Dimension:


600W

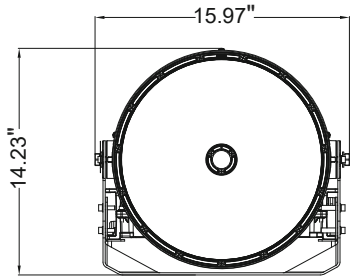

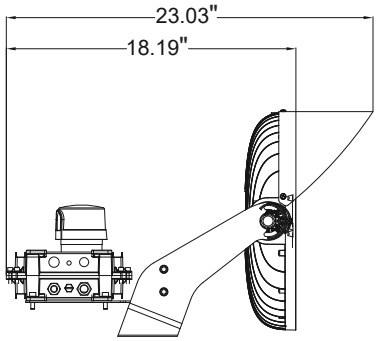

1200W

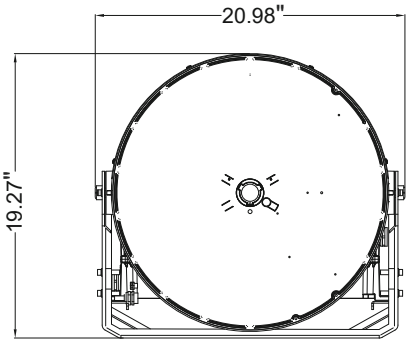

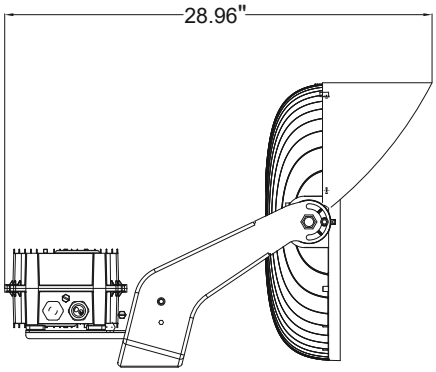

LED STADIUM LIGHT (SR05)

WATTAGES: 600/500/400/300W, 1200/1000/800/900W Tunable

Product Accessories:

ACCESSORIES(Standard)



Visors

ACCESSORIES(Sold Separately)



Laser



40°/60° Lens

PRODUCT STRUCTURE CHARACTERISTICS:




Laser Aiming Device
(It can benefit for controlling the lighting beam angle accurately and locate the best installation place for each fixture.)

Visor
(Gather more lighting efficiency, help to deliver the volumetric lighting and low glare.)

Optics
(Advanced optics design with professional layout simulation technology, and availablefor variety beam angle options, 300W-1200W:15°,25°,40°,60°

(When Spot Light adjust to specified angle, Triangle indicator indicates the angle of the laser on the bracket



Cooling system
(Apart from the fixture with individual heat sink design, greatly help to deliver the heatingdissipation. L70 from ISTMT >60,000Hours.)

Photocell
(Photocell can sense strong or weak of sunlight, auto adjust fixture light on/off,power saving.)

Power compartment
Install power supply and wiring inside the power compartment





Waterproof (IP65)
(Dustproof,waterproof,breathable, can balance air pressure between inside and outside of fixture.)

LED STADIUM LIGHT (SR05)

WATTAGES: 600/500/400/300W, 1200/1000/800/900W Tunable

ORDERING GUIDE:


EXAMPLE:

SS-SR05-600W-XX-H-aa-zz


SS	SR05	600W	xx	H	aa	zz
COMPANY	PRODUCT	POWER	Beam Angel	HIGH LUMENS	INPUT VOLTAGE	Function
Starlake	LED Stadium Light	600W=600/500/400/300W 1200W=1200/1000/900/800W	40=60° 60=60°		Blank=AC120-277V MV=AC120-347V HV=AC120 480V	TP(xxx)=only adjust wattage xxK No adjust wattage and color temperature. (xx can be 40=4000K 50=5000K 57=5700K

PHOTOMETRICS:


SS-SR05-600W-25-H-50K

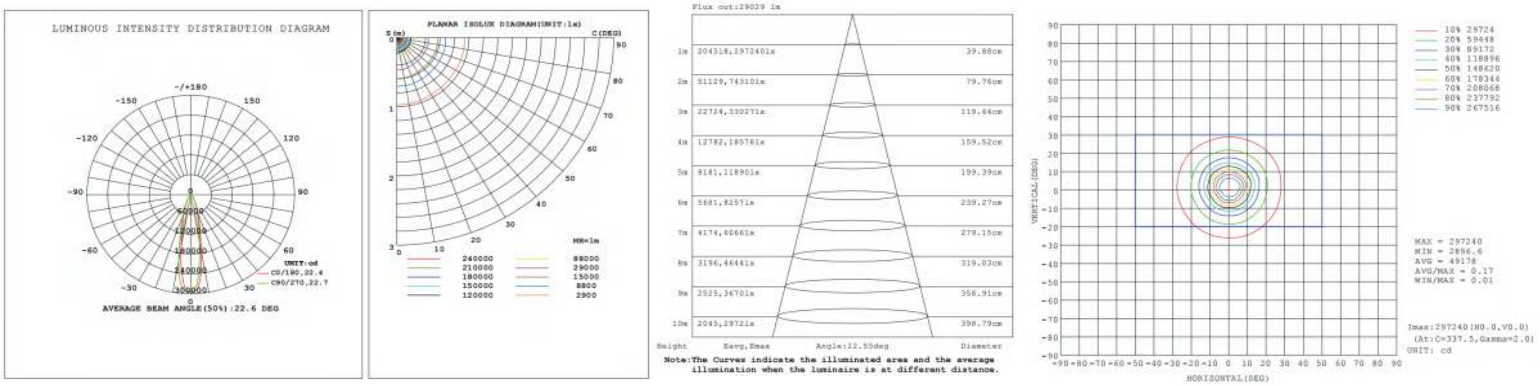

SS-SR05-600W-40-H-50K

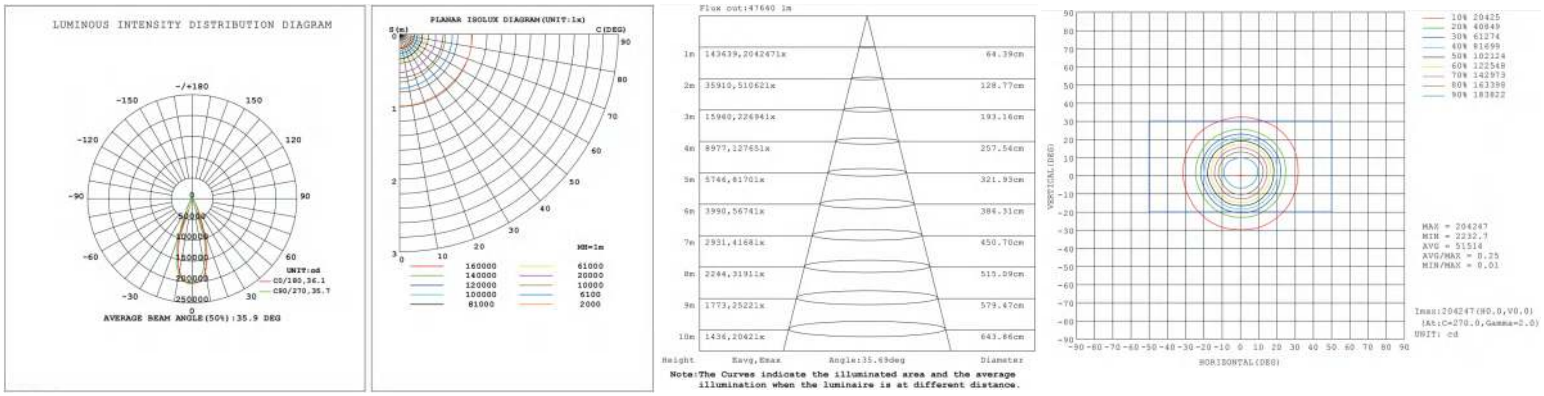

SS-SR05-600W-60-H-50K

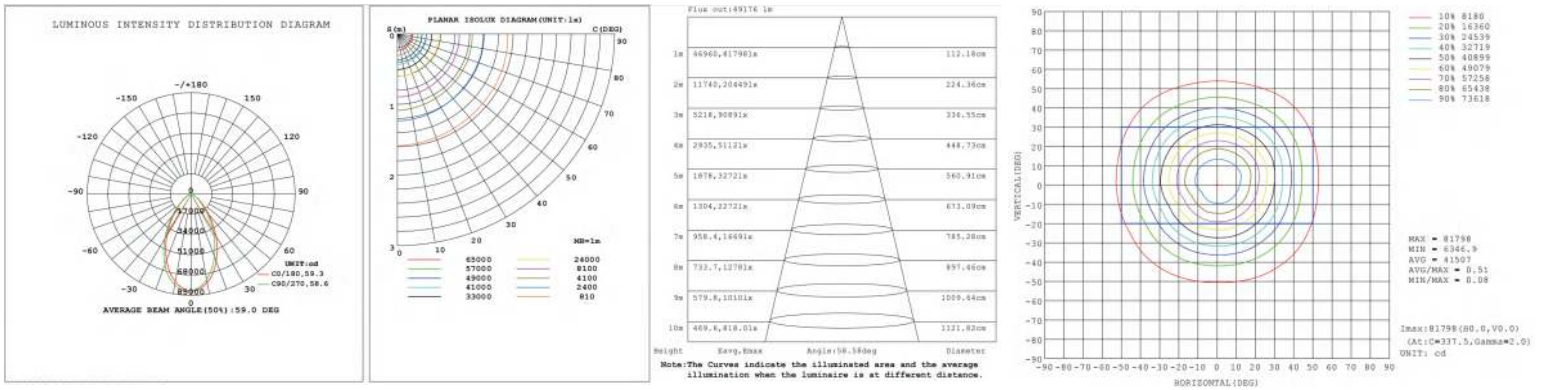

LED STADIUM LIGHT (SR05)

WATTAGES: 600/500/400/300W, 1200/1000/800/900W Tunable

APPLICATIONS:



