LED WALL PACK LIGHT (WK06)

WATTAGES: 120/100/80W Tunable



Replacing metal halide fixtures with WK06 series LED wall pack increases energy efficient and lowers maintenance costs.Rugged die-cast aluminum Heat dissipation, while durable PC lens is UV-stabilized to withstand conditions of outdoor industrial or commercial locations.

Product Features:

- Aesthetic, utility appearance, and patented;
- Optically designed PC cover, almost no dark macula, which makes the whole lamp emit light evenly and meets the requirements of DLC Premium 6.0;
- Adopt high light transmission and anti-UV PC lampshade;
- Low-voltage light control sensor can be installed, which is safe and reliable;
- Power and CCT selectable are available to meet the different needs of customers and reduce the inventory pressure;
- Easy and fast installation , and traditional junction box installation method is retained;
- Standard respirator extends the service life of lamps.
- IP65, completely waterproof;
- Adjustable angle from 0-90°
- 120-277V / 0-10V and 120-347V/277V-480V,0-10V dimming power supply are available.

	SPECIFICATION
MODEL	SS-WK06-120W-H-TCP
WATTAGE	120/100/80WTunable / 120/100/80/60/40WTunable
LUMENS	16800LM(Max)
CCT	3000K/4000K/5000K Tunable
CRI	Ra>70
INPUT VOLTAGE	AC120-277V/AC120-347V/AC277-480V
OPERATING TEMPERATURE	-40°F~113°F
STORAGE TEMPERATURE	-40°F~158°F
POWER FACTOR	>0.9
DRIVER EFFICIENCY	>90%
PROTECTION LEVEL	Wet Location
LIFE TIME	>50000 hours
WARRANTY	5 years limited

LED WALL PACK LIGHT (WK06)


WATTAGES: 120/100/80W Tunable

PACKING/WEIGHT:

Model	Outer box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs/Kg)	G.W/pcs (lbs/Kg)
120W/100W/80W	L11.22xW10.98xH7.05 inch L285xW279xH179 mm	1pcs/ctn	5.51Lbs(2.50Kg)	6.83Lbs(3.10Kg)

PRODUCT DIMENSION:

120W/100W/80W

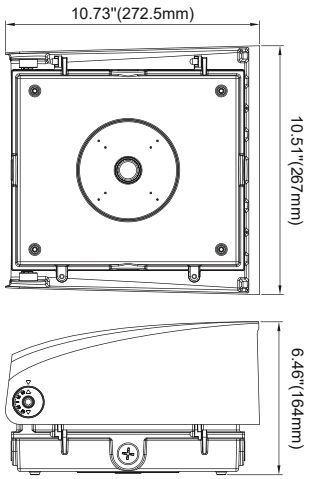

Product Accessories

ACCESSORIES MOUNTING BRACKETS(Standard)



4 Pcs Screws



5 Pcs Wire Nuts



1 Pcs foam

ACCESSORIES(Sold Separately)



ANT-5-4T
ANT-6-4T



ANT-5-16B-3



Emergency Driver

LED WALL PACK LIGHT (WK06)

WATTAGES: 120/100/80W Tunable

ORDERING GUIDE:

EXAMPLE:


SS-WK06-120W-H-TCP-Y

SS	WK06	120W	H	xx	TCP	Y
COMPANY	PRODUCT	POWER	HIGH LUMENS	INPUT VOLTAGE	Tunable CCT and Power	CONTROL
Starlake	LED WALL PACK	120W=120/100/80W 120W=120/100/80/60/40W		Blank=120-277Vac MV=120-347Vac HV=277-480Vac	3000K/4000K/5000K	A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) C: BRT sensor (occupancy+bluetooth) D: PHB sensor (Infrared bluetooth) F: Photocell Blank: no provide sensor


PHOTOMETRICS:

For complete IES files, please visit our website.


SS-WK06-120W-H-5000K

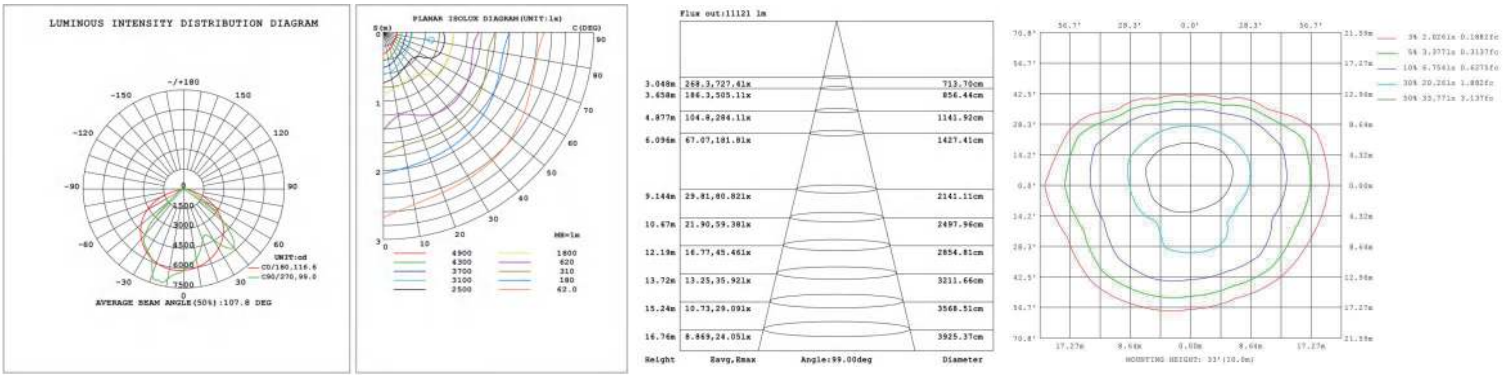

SS-WK06-80W-H-5000K

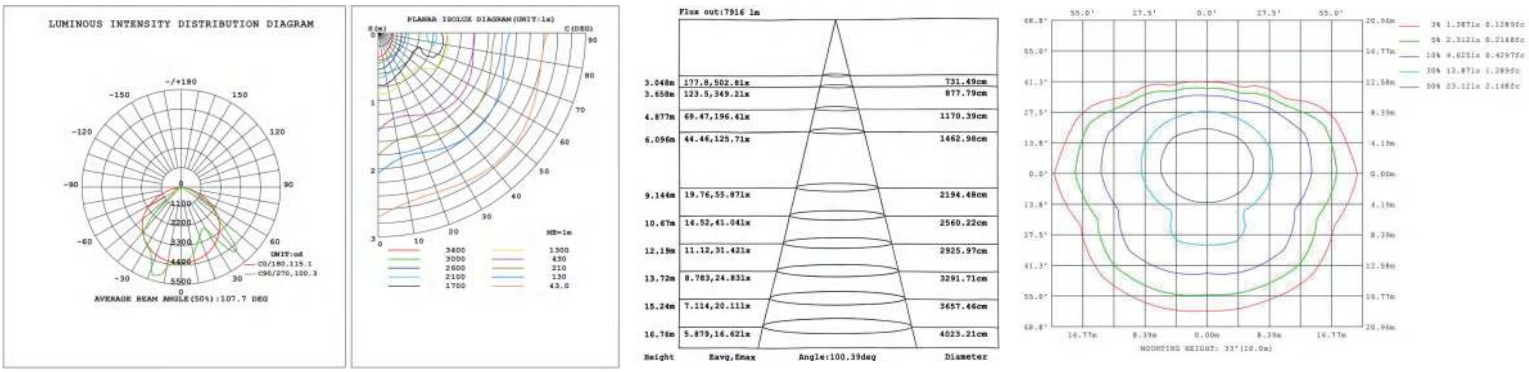


SS-WK06-60W-H-5000K

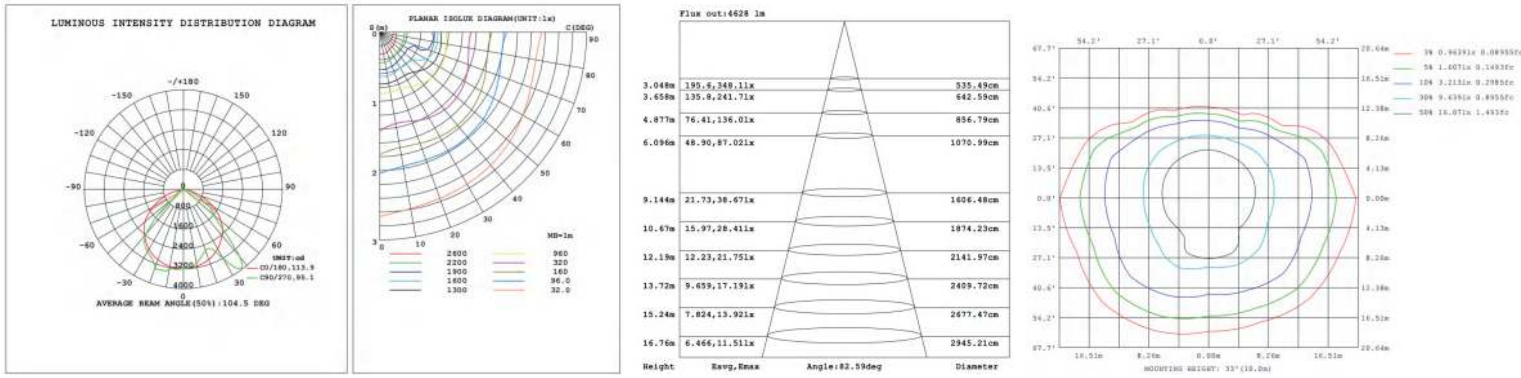



LED WALL PACK LIGHT (WK06)


WATTAGES: 120/100/80W Tunable

SS-WK06-40W-H-5000K

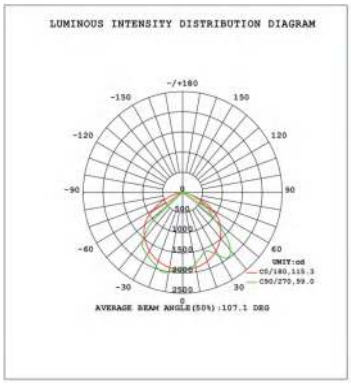

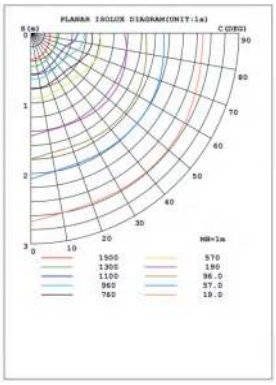


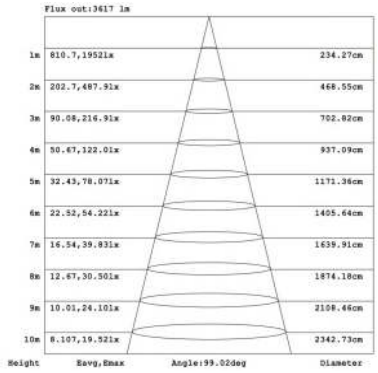

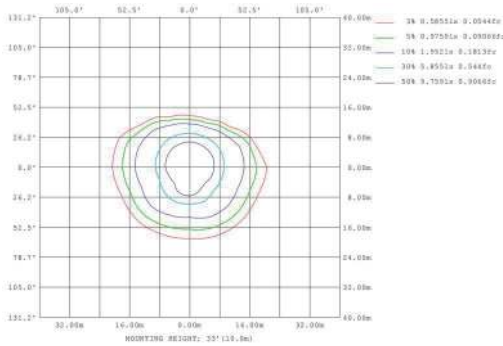


Installation Instruction


1. Use a screwdriver to remove the screw and the fixing knob and remove the heat sink assembly.

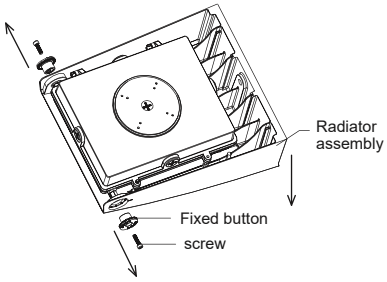


2. Use a screwdriver to remove the screw and remove the outer casing.

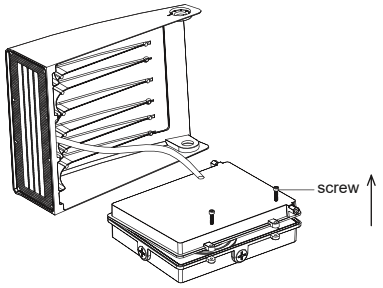


3. Unscrew the cover of the entry hole on the lamp base and remove the cover.

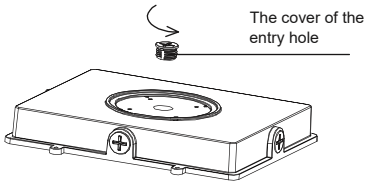


4. According to the embedded terminal box, punch the correspongding mounting hole on the light's mount.




5. Tear off the adhesive paper of the waterproof pad and stick the waterproof pad to the lamp base.

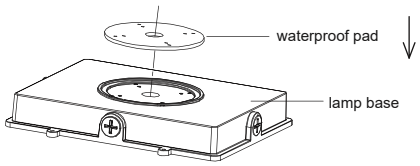


6. Put the input line and dimming line (if not, please ignore) from the embedded junction box through the lamp base and then screw the lamp base to the embedded junction box.




7. Install the upper half of the fixture on the lamp base, then use the threaded terminal to connect L/N/ ground wire, dim+/dim-(if not, please ignore) separately,and then plug the threaded terminals into the embedded junction box,adjust the switch to the required color temperature.



8. Screw the case with a screwdriver.

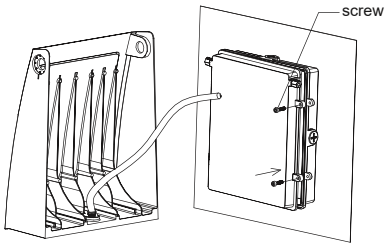

9. Install the heat sink assembly and tighten the screws and fixing knob with a screwdriver to complete the installation.



Add: #358, Baotian 1st Road, Tiegang Community, Xixiang Street,Baoan District, Shenzhen, 518110.
Tel: +86-0755-21008727 | Fax: +86-0755-21008727 | Web: www.starlakeled.com | E-mail: sales@starlakeled.com

LED WALL PACK LIGHT (WK06)

WATTAGES: 120/100/80W Tunable

Applications:



